

MultiRoute **ESR579**

ESR579 is designed for handling diverse road conditions with better mileage and durability.




CONTROL



SAFETY



LONGEVITY

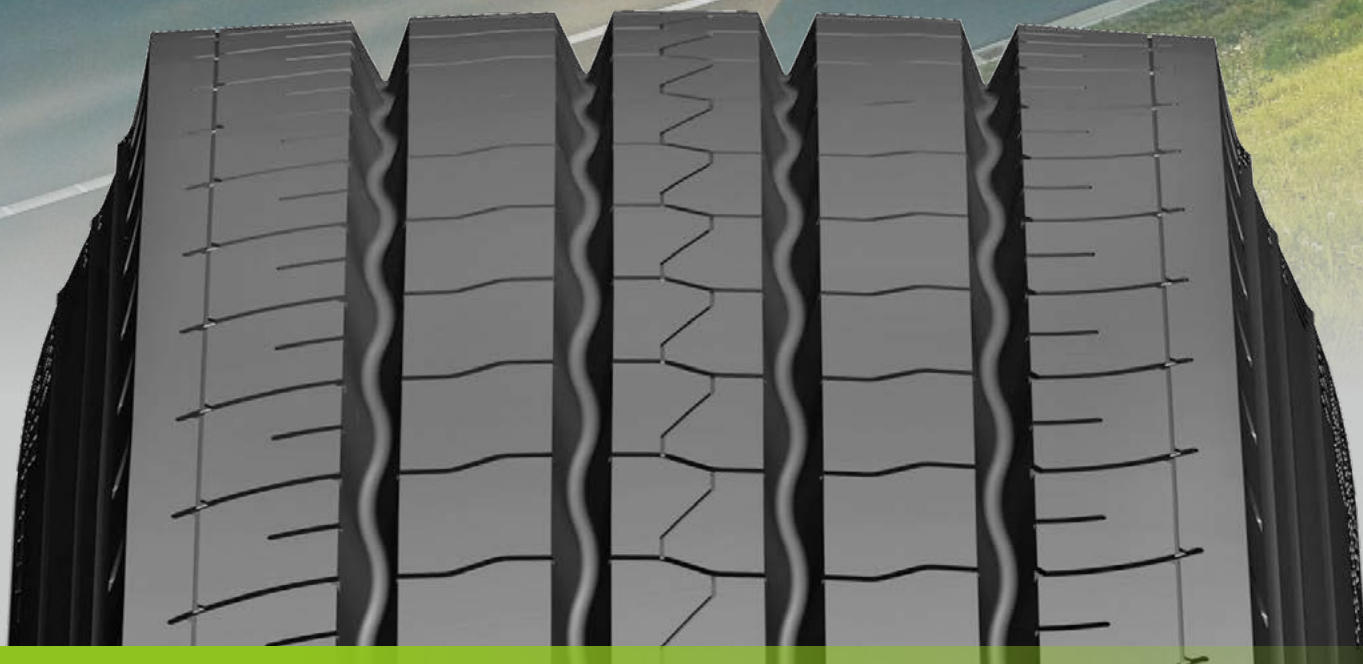

EVERGREEN

drive to the future

MultiRoute ESR579



Features

New casing construction and optimized footprint design

Optimized 5-rib tread design with higher void ratio

Optimized carcass structure

Stone ejection system with waved grooves

Widened tread width design

Benefits

- ▶ Designed for regular wear delivering excellent mileage performance
- ▶ Provides high mileage and excellent handling
- ▶ Outstanding durability and retreadability
- ▶ Eliminates stone retention for extended tire life
- ▶ Enhances vehicle stability and extends wear life

Size

Size	PR	LI/SS	Type	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Load		Pressure	
								S(kg)	D(kg)	S(kPa)	D(kPa)
9.5R17.5	18	143/141J	T/L	6.75	842	240	13.5	2725	2575	875	875
12R22.5	18	152/149L	T/L	9.00	1085	300	17	3550	3250	930	930
205/75R17.5	14	124/122M	T/L	6.00	753	205	13	1600	1500	750	750
215/75R17.5	16	135/133L	T/L	6.00	767	211	12.5	2180	2060	860	860
235/75R17.5	16	132/130M	T/L	6.75	797	233	13	2000	1900	760	760
235/75R17.5	18	143/141L	T/L	6.75	797	233	13	2725	2575	860	860
245/70R19.5	18	144/142K	T/L	7.50	839	248	14	2800	2650	900	900
255/70R22.5	16	140/137M	T/L	7.50	930	255	13.5	2500	2300	830	830
265/70R19.5	18	143/141J	T/L	7.50	867	262	13.5	2725	2575	900	900
275/70R22.5	16	148/145M	T/L	8.25	958	276	14.5	3150	2900	900	900
295/80R22.5	18	152/149M	T/L	9.00	1044	298	16	3550	3250	900	900
315/70R22.5	18	156/150L	T/L	9.00	1014	312	15.5	4000	3350	900	900
315/80R22.5	20	156/153L	T/L	9.00	1076	312	16.5	4000	3650	850	850